


# How to shorten the PU-strap on Rosendahl Watches



Slide the SS buckle and PU strap in sideways without using any tools:



After sliding of both ends of the strap, you measure and cut the strap down to the correct size. Cut away the same length on both sides, and cut away one extra bit on "the side of the thumb" if the correct length does not divide by 2:

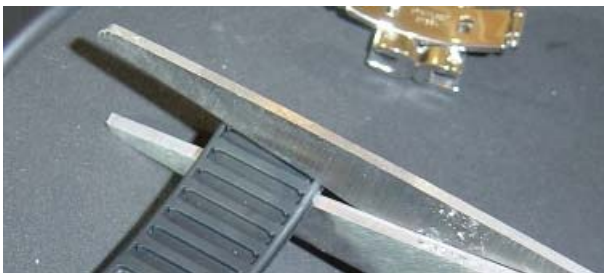

Slide the buckle back onto the straps. If you add a bit of water, then the strap slides on much easier:



## PLEASE NOTE:

One piece of advice is initially to cut off too little. Then refit the buckle and try the first shortening on your wrist. Now you can repeat the process and cut away the final bit. Otherwise you may end up cutting away too much the first time.

The PU strap is designed to have a loose fit around the wrist.

## Lindholts Furniturehandel ApS.

Sportsvej 6 - 8930 Randers NØ

Tlf.: 86 42 52 99 - Fax: 86 41 37 45 - [lindholts@email.dk](mailto:lindholts@email.dk) - [www.lindholts.dk](http://www.lindholts.dk)